

PACKAGE AIR COOLED BLOW FILM

PRODUCTION BENEFITS:

- Greatly upgrades shiness ang transparency of plastic bags.
- Specially designed high air flow and low humidity.
- Upgrades machine speed and productivity . Increases firm production.
- Minimizes defeat ratio of production.
- Maximum stability temperature control.



BLOW FILM MACHINE

**Controlled by PLC
(Programmable Logic Controller)**



SAHAKIJ-ANAN INTERNATIONAL CO.,LTD.

434 Sukhumvit 77 Rd., (Soi On-nut 17 Yek 16), Suanluang, Bangkok 10250, Thailand

Tel : +66(0) 2717 9244-6 Fax : +66(0) 2717 9248



WEB SITE <http://www.sahakijanan.com> E-mail : service@sahakijanan.com

<http://www.vichchiller.com>



PRODUCTION BENEFITS:

- Greatly upgrades shines and transparency of plastic bags.
- Specially designed high air flow and low humidity.
- Upgrades machine speed and productivity . Increases firm production.
- Minimizes defeat ratio of production.
- Maximum stability temperature control.

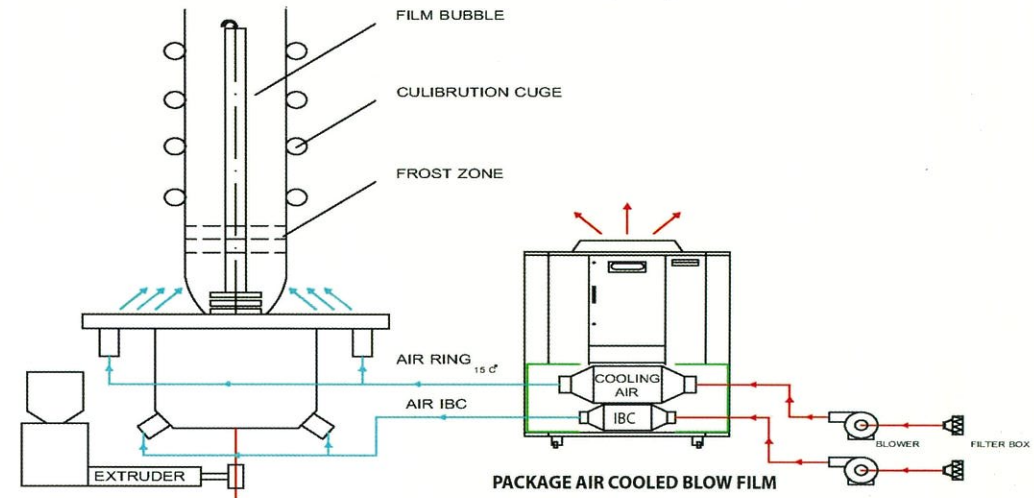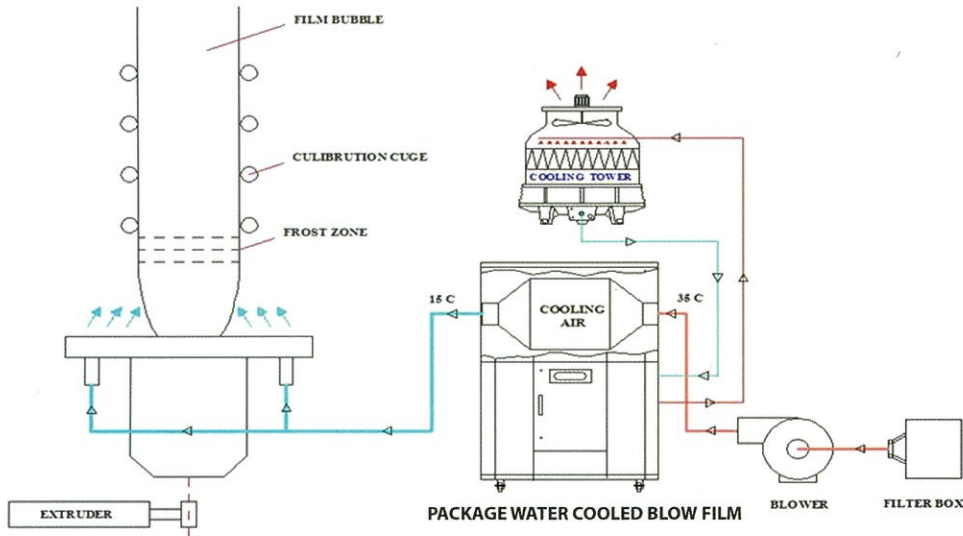

SPECIFICATION:

MODEL		SK/WCBF-6	SK/WCBF-8	SK/WCBF-12	SK/WCBF-15	SK/WCBF-20	SK/WCBF-25
Air flow	m ³ /min (m3/hr)	16(1000)	25(1500)	33(2000)	50(3000)	66(4000)	91(5500)
Air outlet port	INCH	6"	8"	8"	8"	10"	10"
Air cooling temperature	C	8°C - 18°C					
Power supply	V/PH/Hz	380 / 3 / 50					
Rate power	kW	12	17.3	27.2	29.4	39.2	54.4
Controller		CONTROLLED BY PLC (PROGRAMMABLE LOGIC CONTROLLER)					
Refrigerating capacity	Btu/H	72000	96000	144000	180000	240000	300000
Compressor motor	HP	7-1/2	10	15	20	12 x 2	15 x 2
Condenser flow rate	GPM	19	22	36	45	60	73
Water connection In/Out	INCH	1-1/4"	1-1/2"	1-1/2"	2"	2"	2-1/2"
Refrigerant	R	R-22 / R-407c					
Machine dimensions	W x H x D	1300 x 1970 x 1140		1300 x 2200 x 1140		2400 x 2200 x 1140	
Machine weight	KG	435	440	475	485	922	1060

NOTE:- Nominal cooling capacity condition : chilled air out 8c. Ambient temperature 35c

**Specifications subject to change without notice

<http://www.sahakijanan.com>

<http://www.vichchiller.com>